

SLP-D420

4인치 직접 감열식
데스크탑 라벨 프린터



창고관리



우편·택배




병원·약국



관광·외식

Compact and Specialized

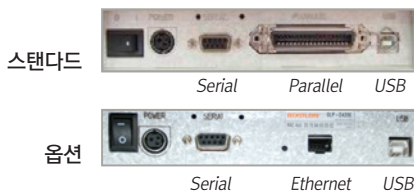

트리플 인터페이스

- 스탠다드형: USB + Serial + Parallel
- 옵션형: USB + Serial + Ethernet

탁월한 제품 설계

- 최고 6 ips (152 mm/sec)의 인쇄속도
- 데이터 처리가 빠른 메모리 탑재
- 4인치 이하 용지 전용 컴팩트한 디자인
- 에너지 고효율 제품



BIXOLON[®]
a Better Solution for your Business[™]

SLP-D420

4인치 직접 감열식 데스크탑 라벨 프린터



Standard

Peeler

Auto-cutter

강력한 호환성

주요 프로그래밍 언어와 호환성이 높습니다.



BPL-Z™

BPL-E™

사용자 중심의 디자인

- 다양한 타입의 센서가 탑재되어 있습니다.
- 용지 교체가 간편합니다.



Media roll holder

External paper supplier

빅솔론 Label Artist™

엑셀, 텍스트, 액세스 파일 등으로 작성된 데이터베이스를 불러와 출력하거나 사용자가 직접 라벨 디자인을 변경할 수 있는 프로그램을 무상으로 제공하고 있습니다.

제품사양

Printer Specifications	
Print Method	Direct Thermal
Print Speed	SLP-D420: Up to 6 ips (152 mm/sec) SLP-D423: Up to 4 ips (100 mm/sec)
Print Resolution	SLP-D420: 203 dpi SLP-D423: 300 dpi
Print Width	SLP-D420: Up to 104 mm SLP-D423: Up to 105.7 mm
Print Length	6 ~ 1000 mm
Sensor	Transmissive, Reflective (adjustable), Head open
Media Characteristics	
Media Type	Gap, Black Mark, Notch, Continuous, Fan-Fold
Media Width	25 ~ 116 mm
Media Roll Diameter	Up to 130 mm
Media Thickness	0.06 ~ 0.20 mm
Supply Method	Easy Paper Loading
Physical Characteristics	
Dimensions (WxLxD)	194 x 243 x 171 mm (7.63 x 9.56 x 6.73 inch)
Weight	2.15 kg (4.73 lbs.)
Power	EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz
Performance Characteristics	
Memory	8MB SDRAM, 4MB FlashROM
Interface	Triple Interface Standard: USB + Serial + Parallel Optional: USB + Serial + Ethernet
Environment Characteristics	
Temperature	Operating: 0 ~ 40°C (32 ~ 104°F) Storage: -20 ~ 60°C (-4 ~ 140°F)
Humidity	Operating: 10 ~ 80% RH Storage: 10 ~ 90% RH
Software	
Emulation	SLCS, BPL-Z™, BPL-E™
Driver / Utility	Windows Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™
SDK	Android SDK, Windows SDK
Fonts / Graphics / Symbologies	
Fonts	• 10 SLCS Resident Bitmap Fonts • One SLCS Resident Scalable Font • 23 Code Page
Graphics	Supporting user-defined fonts, graphics, formats, and logos
Barcode Symbologies	1D: Coda Bar, Code 39, Code 93, Code 128, EAN-8, EAN-13, IMB, Interleaved 2-of-5, ITF, UCC/EAN-128, UPC-A, UPC-E 2D: Data Matrix, MaxiCode, PDF417, QR Code
Options	
Ethernet, WLAN (USB dongle type), Peeler, Auto Cutter, RTC (Real Time Clock), External Paper Supply	

BR-SLP-D420-KR-SEP15-V1

Copyright © BIXOLON Co., Ltd. All rights reserved.

Features and specifications are subject to change without prior notice.

BIXOLON®

www.bixolon.com



BIXOLON Co., Ltd.

경기도 성남시 분당구 판교역로 241번길
20 (삼평동 685) 7~8층 (우13494)

Tel 031 218 5500

Fax 031 218 5589

E-mail sales@bixolon.com

BIXOLON America Inc.

3171 Fujita St Torrance,
CA 90505, USA

Tel +1 858 764 4580

Fax +1 310 257 6869

E-mail sales@bixolonusa.com

BIXOLON Europe GmbH

Tiefenbroicher Weg 35, 40472
Düsseldorf, Germany

Tel +49 211 68 78 54 0

Fax +49 211 68 78 54 20

E-mail sales@bixolon.de