

# SLP-DX420

4인치 직접 감열식  
데스크탑 라벨 프린터



창고관리



우편·택배




병원·약국



관광·외식

## Compact and Premium

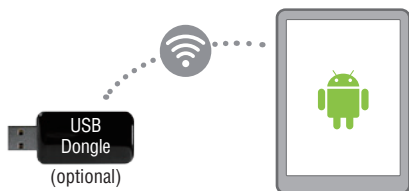


### 비즈니스 환경에 유연

- 안드로이드 태블릿 PC와 연동을 위한 SDK 지원
- 윈도우, 리눅스, 맥 PC용 드라이버 지원
- 옵션형 무선통신 지원: USB dongle 타입의 WLAN
- 다양한 유선통신 지원: USB, Serial, Parallel, Ethernet



### 프리미엄급 제품 설계

- 최고 7 ips (178 mm/sec)의 인쇄속도
- 대용량 메모리 탑재로 빠른 데이터 처리
- 4인치 이하 용지전용 콤팩트한 디자인
- 에너지 효율을 제곱

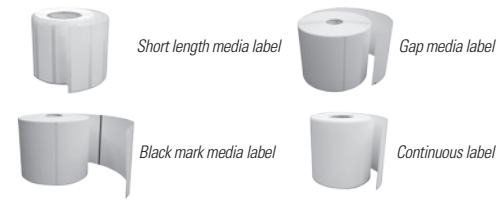

### 인텔리전트 기능 탑재

- Smart Media Detection™은 용지의 타입과 라벨의 길이를 프린터 스스로 판별해 인쇄하는 기능입니다.
- Intelligent Leap-over™은 용지에서 비어있는 라벨을 발견하면 자동으로 그 다음 라벨에 출력하는 기능입니다.



**BIXOLON**<sup>®</sup>  
a Better Solution for your Business™

# SLP-DX420

4인치 직접 감열식 데스크탑 라벨 프린터



## 강력한 호환성

주요 프로그래밍 언어와 완벽하게 호환되며 이를 자동으로 인식해 출력합니다.



BPL-Z™

BPL-E™

## 편리한 소모품 교체

- 용지 장치가 간편합니다.
- 프린트 헤드나 롤러를 도구없이 교체할 수 있습니다.



## 빅솔론 Label Artist™

엑셀, 텍스트, 액세스 파일 등으로 작성된 데이터베이스를 불러와 출력하거나 사용자가 직접 라벨 디자인을 변경할 수 있는 프로그램을 무상으로 제공하고 있습니다.

## 제품사양

### Printer Specifications

<b>Print Method</b>	Thermal Transfer, Direct Thermal
<b>Print Speed</b>	SLP-TX420: Up to 7 ips (178 mm/sec) SLP-TX423: Up to 5 ips (127 mm/sec)
<b>Print Resolution</b>	SLP-TX420: 203 dpi SLP-TX423: 300 dpi
<b>Print Width</b>	SLP-TX420: Up to 108 mm SLP-TX423: Up to 105.7 mm
<b>Print Length</b>	6 ~ 2000 mm
<b>Sensor</b>	Transmissive, Reflective (adjustable), Ribbon-End, Head open

### Media Characteristics

<b>Media Type</b>	Gap, Black Mark, Notch, Continuous, Fan-Fold
<b>Media Width</b>	20 ~ 110 mm
<b>Media Roll Diameter</b>	Up to 130 mm
<b>Media Thickness</b>	0.06 ~ 0.20 mm
<b>Supply Method</b>	Easy Paper Loading

### Physical Characteristics

<b>Dimensions (WxLxD)</b>	194 x 243 x 171 mm (7.63 x 9.56 x 6.73 inch)
<b>Weight</b>	2.20 kg (4.85 lbs.)
<b>Power</b>	EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz

### Performance Characteristics

<b>Memory</b>	64MB SDRAM, 128MB FlashROM
<b>Interface</b>	Triple Interface Standard: USB + Serial + Parallel Optional: USB + Serial + Ethernet + WLAN* *WLAN: 802.11b/g/n USB dongle type (optional)

### Environment Characteristics

<b>Temperature</b>	Operating: 0 ~ 40°C (32 ~ 104°F) Storage: -20 ~ 60°C (-4 ~ 140°F)
<b>Humidity</b>	Operating: 10 ~ 80% RH / Storage: 10 ~ 90% RH

### Software

<b>Emulation</b>	SLCS, BPL-Z™, BPL-E™
<b>Driver / Utility</b>	Windows Driver (Euro Plus/Seagull), OPOS Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™
<b>SDK</b>	Android SDK, Windows SDK

### Fonts / Graphics / Symbologies

<b>Fonts</b>	<ul style="list-style-type: none"> <li>• 10 SLCS Resident Bitmap Fonts</li> <li>• One SLCS Resident Scalable Font</li> <li>• 16 BPL-Z™ Resident Bitmap Fonts</li> <li>• One BPL-Z™ Resident Scalable Font</li> <li>• 5 BPL-E™ Resident Bitmap Fonts</li> <li>• 23 Code Page</li> <li>• Unicode supported (UTF-8, UTF-16LE, UTF-16BE)</li> </ul>
<b>Graphics</b>	Supporting user-defined fonts, graphics, formats, and logos
<b>Barcode Symbologies</b>	1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB 2D: Aztec, Codablock, Code 49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR code, TLC 39

### Options

Ethernet, WLAN (USB dongle type), Peeler, Auto Cutter, RTC (Real Time Clock), External Paper Supply

BR-SLP-DX420-KR-SEP15-V1

Copyright © BIXOLON Co., Ltd. All rights reserved.

Features and specifications are subject to change without prior notice.

**BIXOLON®**

www.bixolon.com



**BIXOLON Co., Ltd.**

경기도 성남시 분당구 판교역로 241번길  
20 (삼평동 685) 7~8층 (우13494)

Tel 031 218 5500

Fax 031 218 5589

E-mail sales@bixolon.com

**BIXOLON America Inc.**

3171 Fujita St Torrance,  
CA 90505, USA

Tel +1 858 764 4580

Fax +1 310 257 6869

E-mail sales@bixolonusa.com

**BIXOLON Europe GmbH**

Tiefenbroicher Weg 35, 40472  
Düsseldorf, Germany

Tel +49 211 68 78 54 0

Fax +49 211 68 78 54 20

E-mail sales@bixolon.de